





SILENT STEEL® 280 SERIES CURTAIN TRACKS

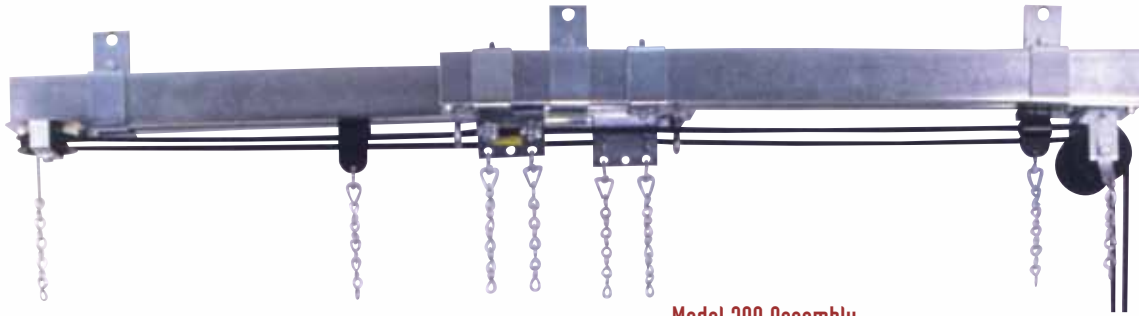


Model 280 Assembly

Cross Section of 280 Suspended

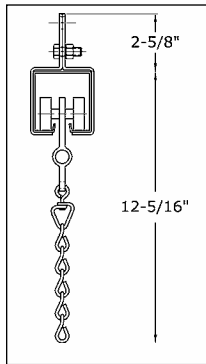


Cross Section of 280 Ceiling Mount

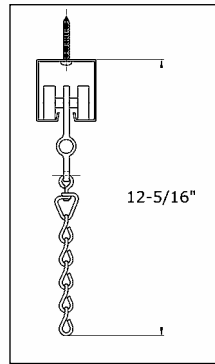

Cross Section of 280 Track at Center Overlap Pipe Mounted

Min. pocket width: 7 in.

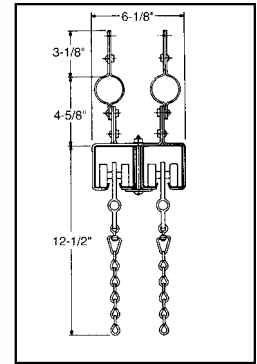

SILENT STEEL® MODEL 280 [380]

SILENT STEEL is the most famous name in heavy duty stage tracks. Model 280 steel (380 steel (aluminum available)) is used in the majority of stage installations with heavy weight curtains of almost any length and is particularly quiet in operation. Models 281(381) and 282(382) can be used for heavier curtains. They are essentially identical to Model 280(380) except Model 281(381) is equipped with neoprene-tired ball-bearing carriers and Model 282(382) is supplied with nylon tired ball-bearing carriers. Both systems are equipped with larger diameter floor and end pulleys.

MODEL 281 [381]

Model 281(381) features quiet and smooth operating No. 2849(BL) Neoprene Ball-Bearing Single Carriers and No. 2850(BL) Neoprene Ball-Bearing Master Carriers. No. 2827 Rubber Spacers are used to reduce noise even further. With Model 281(381) Back Pack® tracks No. 2826 and No. 2827 Rubber Spacers are used.

MODEL 282 [382]

Model 282(382) features No. 2851(BL) Nylon Ball-Bearing Single Carriers and No. 2852(BL) Nylon Ball-Bearing Master Carriers. No. 2827 Rubber Spacer is used in place of No. 2825. No. 2863(BL) 5" Live End Pulley, No. 2864(BL) 5" Dead End Pulley and No. 2866(BL) 5" Adjustable Floor Pulley help in easing the operation of heavy curtains. With Model 282(382) Back Pack® tracks No. 2826 and No. 2827 Rubber Spacers are used.

MODEL 280-A [380-A]

Model 280-A(380-A) is identical to Model 280(380) except No. 2801-B(BL) Single Carriers (with plated steel block) are used instead of the nylon blocked No. 2801(BL).

MODELS 283-N [383-N] and 283-R [383-R]

Model 283-N(383-N) and Model 283-R(383-R) employ No. 2863-A(BL) 8" Live End Pulleys, No. 2864-A(BL) 8" Dead End Pulleys and No. 2866-A 8" Adjustable Floor Pulleys which combined with the No. 2830 1/2" Sash Cord reduce operating effort on systems with heavy curtains. The difference between Model 283-N(383-N) and 283-R(383-R) is as follows: Model 283-N(383-N) uses No. 2851(BL) Nylon Ball-Bearing Single Carriers and No. 2852(BL) Nylon Ball-Bearing Master Carriers while Model 283-R(383-R) uses No. 2849(BL) Neoprene Ball-Bearing Single Carriers and No. 2850(BL) Neoprene Ball-Bearing Master Carriers. Not recommended for light duty applications.

Model 284 [384], 284-N [284-N], and 284-R [284-R]

Model 284(384), 284-N(384-N), and 284-R(284-R) are for walk-along operation only and are provided with no pulleys or operating cord. The difference between Model 284-N(384-N) and 284-R(384-R) is as follows: Model 284(384) employs 2801(BL) single and 2802(BL) master carriers. Model 284-N(384-N): No. 2851(BL) Nylon Ball-Bearing Single Carriers and No. 2852(BL) Nylon Ball-Bearing Master Carriers are used. Model 284-R(384-R): No. 2849(BL) Neoprene Ball-Bearing Single Carriers and No. 2850(BL) Neoprene Ball-Bearing Master Carriers are used. Not recommended for light duty applications.

NOTE: Component parts also available in black. Designated by [BL] after part number.

280(380) Series tracks cannot be curved.