



TRAVEL FAR!

Road Ready Traveler Track

Specifics:

- Variable Width
- Rope Operated or Walk Along
- One Way or Bi-Parting
- Strong Steel Construction
- Powercoated Black
- Durable, Quiet Carriers
- 10' and 5' Sections for Easy Install
- "Burgers" Clamp Straight to Truss

Why You'll Love Them:

Just as important as having beautiful curtains is having reliable tracks that support and transport them across the stage. And when the drape fits the track and the track fits the drape, you're in for a show!

We're proud to feature a full complement of superior-quality American-made curtain tracks by ADC, one of the premier manufactures of theatrical curtain transport systems and the only brand that has won UL approval.

Available as a rental from the most basic manual walk along to a rope pull system, ADC tracks assure a moving performance at the highest standards.

Famous Friends:

R Kelly and Victoria's Secret are just a couple of shows that opened far, using this Travel Far! *Road Ready Traveler Track!*





INSTRUCTIONS

Road Ready Traveler Track

Assembly Instructions for Road-Ready Traveler Track; Side-Parting

Just as important as having beautiful curtains is having reliable tracks that support and transport them across the stage. When the drape fits the track and the track fits the drape, you're in for a show!

- 1) Lay out the track matching the pins to sockets at ends. Starting from the center, hang the track to the truss or pipe using the attached burger clamps with pins fitted inside sockets.
- 2) Decide which side you would like the drape to open. Slide the master carrier onto the track slot with the arm facing the direction the drape will close.
- 3) Count the hanging points on one of drapes and subtract 4. Slide this number of single carriers onto the track after the master carrier.



- 4) Install the live-end pulley onto the track at this end, sliding the guide in the track with the wheels facing down.




- 5) Slide dead-end pulley onto other end with offset opposite to the live-end pulley offset.



- 6) Stretch out the length of rope to remove any kinks, twists, or knots.

- 7) Starting on the dead-end side, feed the rope end through the dead-end pulley wheel directly below the track.

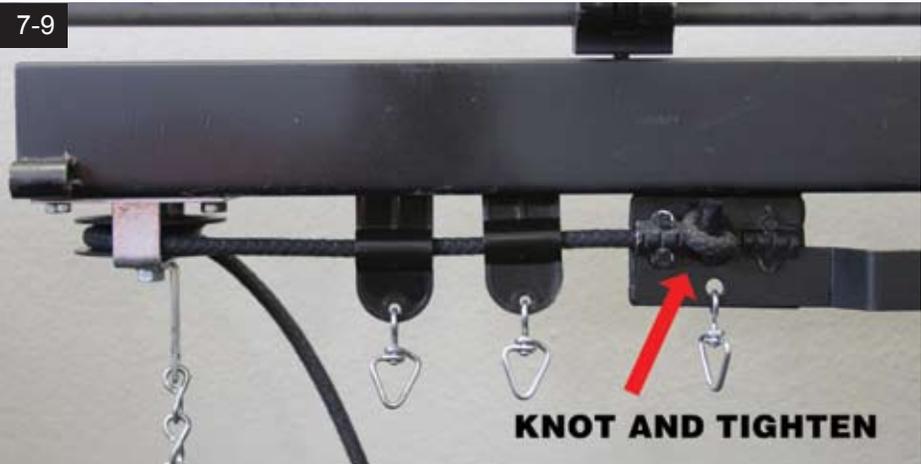

- 8) Loosen the bolts on the first master carrier rope bracket on the dead end side of the track, insert the rope end, and tie a knot. Tighten the bolts on this rope bracket.

- 9) Take the other end of the rope, and string through the other side of the dead end pulley wheel, pulling all slack through. (Cont. next page)

Contact:
310-639-7000



INSTRUCTIONS

Road Ready Traveler Track

Assembly Instructions for Road-Ready Traveler Track; Side-Parting (Continued)

10) String rope through the live end pulley on the offset side, then thread rope down through the floor pulley and back up through the remaining wheel on the live-end pulley



11) Thread rope end through single carriers.




12) Pull rope through the remaining bolt bracket on the master carrier, tighten bolts and tie a knot.



13) Fly truss up to trim height, measure excess rope between live end pulley and floor pulley with sand bag hanging one foot off ground.

14) Lower truss and pull measured excess feet of rope through the last bolt bracket (on dead end side). Tighten bracket bolts and tie a knot. Coil and tie excess rope, and leave to hang behind drape.

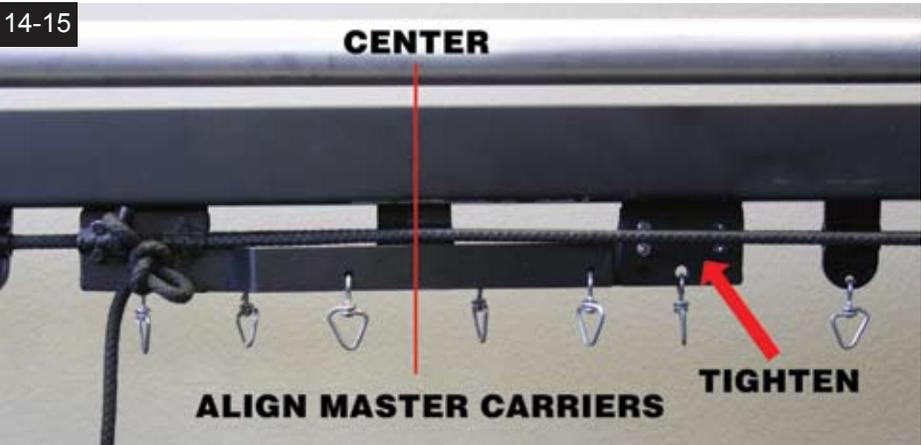

15) Hang drapes starting from master carrier, and tie the last drape hanging point to the stationary chain on the live end pulley. (Cont. next page)

Contact:
310-639-7000



INSTRUCTIONS

Road Ready Traveler Track



Assembly Instructions for Road-Ready Traveler Track; Side-Parting (Continued)

16) Fly to trim height and test. Adjust as needed by loosening end bolt bracket and retying knot to adjust rope length as needed.



17) Hang drapes starting from master carriers at center working toward the offstage sides, and tie the last drape hanging point to the stationary chain at each end.



18) Fly to trim height and test. Adjust as needed by loosening end bolt bracket and retying knot to adjust rope length as needed.

Contact:
310-639-7000